

IMCOS-9020-S Watertight socket for single-way portable self-powered telephone



Product description

IMCOS-9020-S is a watertight socket used for connection of portable single-way selfpowered telephones (IMCOS-9020-P).

Suitable for marine applications.

Features


- Coated aluminium watertight box
- Grey colour RAL 7001
- Ingress Protection IP 65
- 24 V DC power supply provided as an option



Specification

Material	Coated aluminium - grey colour RAL 7001
Mounting	Wall mounting
Wiring	Screw terminals inside Cable type: 3 cores screened cable +1 per added station the network
Cable glands optional gland	1x PGxx according to incoming cable size 1x PG16 (to be added if external relay unit is needed)
Dimensions	Height 120 mm, width 122 mm, depth 81 mm
Weight	1,2 Kg
Ingress protection	IP65

IMCOS-9020-S Dimensions & fixing

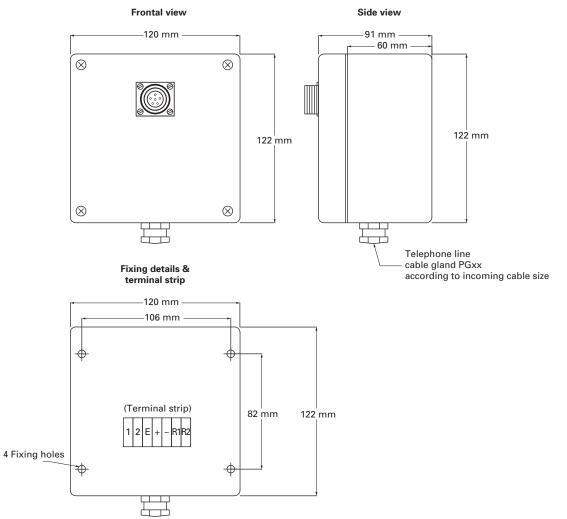

Ordering requirements

The following code is designed to help in selection of the correct unit. Build up the reference number by inserting the code for each component into the appropriate box.





© 2018 Eaton All Rights Reserved Printed in EMEA Reference No. DSIM0094A June 2018

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

All specifications, dimensions, weights and tolerances are nominal (typical) and Gitiesse reserve the right to vary all data without prior notice. No liability is accepted for any consequence of use.

IMCOS[™] System is type approved by seven marine class societies.

