

IMCOS-6069-V2 A/V signals controller



Product description

IMCOS-6069-V2 is a stand-alone logic controller for audio and visual devices installed as reinforcement of IMCOS-PA/GA.

IMCOS-6069-V2 can drive up to 20 A/V devices (e.g. IMCOS-6078 indicators series, IMCOS-6089 mimic panel)

IMCOS-6069-V2 is synchronized with IMCOS through dry contacts or RS-485.

Features

- Coated steel enclosure IP66
- Independent activation of up to 20 different devices
- Custom cable entry plate
- 110/230 VAC or 24 DC power supply available
- Fully customizable firmware according to customer specification




Powering Business Worldwide

Specification

| | |
|--------------------|---|
| Material | Coated steel - grey color RAL 7032 |
| Cable glands | Standard: rubber plate multi-size cable |
| Mounting | Wall mounting; bracket included |
| Wiring | Removable terminal blocks |
| Dimensions | Height 700 mm, width 500 mm, depth 260 mm |
| Weight | 20 Kg (approx.) |
| Ingress protection | IP66 |
| Power supply | 110/230 VAC 50Hz – 24VDC |

IMCOS-6069-V2 general arrangement drawing (all dimensions in mm)

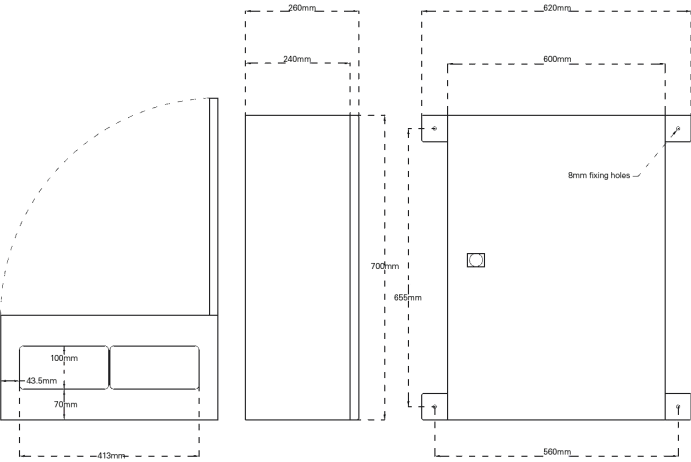

Ordering requirements

The following code is designed to help in selection of the correct unit. Build up the reference number by inserting the code for each component into the appropriate box.

Model

IMCOS-6069-V2

Fixing centre-to-centre distance with lugs (M8 screw)

