

IMCOS-4409 Electric bell



Product description

IMCOS-4409 is a wall mounting electric bell. Suitable for reinforcement of alarm notification.

Available in two versions: bell only or bell and lamp.


Features

- Two versions are available:
 - electric bell only (IMCOS-4409);
 - electric bell with red lamp (IMCOS-4409-L)
- 110 / 220 V AC powering
- 50 / 60 Hz frequency
- Bell & Lamp fused independently on IMCOS-4409-L
- Ingress Protection IP56

Specification

| | |
|--------------------------------|--------------------------------------|
| Material | Steel – black colour RAL 9005 |
| Mounting | Wall mounting |
| Ingress protection | IP 56 |
| Weight | 1,7 Kg 1,8 Kg. (/L option) |
| Spl 1m | > 95 dB(A) |
| Power supply | 110 / 220 V AC |
| Current | < 0,11 A < 0,15 A (/L option) |
| Power consumpt. | 7 W 17 W (/L option) |
| Frequency | 50 / 60 Hz |
| Test certifications | |
| Conducted & radiated emissions | EN 61000-6-3: 2007+A1:2011 |
| Harmonic current emissions | EN 61000-3-2: 2006+A1: 2009+A2: 2009 |
| Voltage fluctuations & flicker | EN 61000-3-3: 2008 |
| Immunity | EN 50121-4: 2011 |
| Hazardous substances | European RoHS standard 2011/65/EU |

IMCOS-4409 Dimensions & fixing

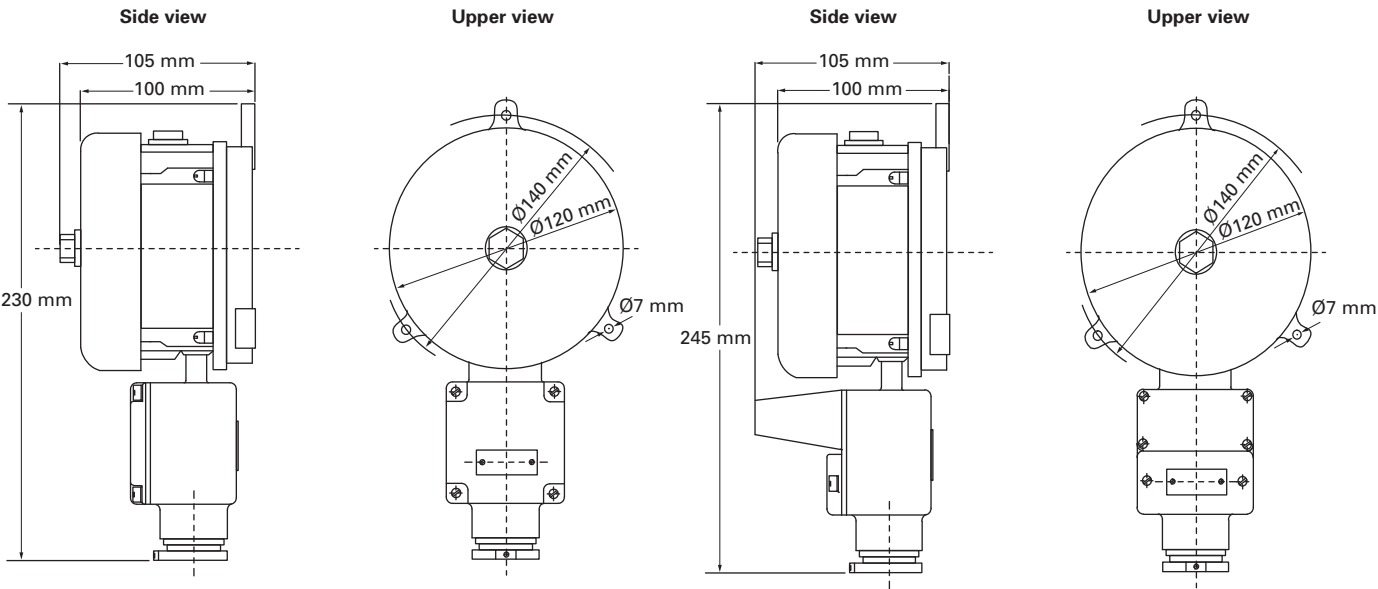

Ordering requirements

The following code is designed to help in selection of the correct unit. Build up the reference number by inserting the code for each component into the appropriate box.

| Model | Options | Power Supply | Frequency | | | | | | | | | | | | | | | | | | |
|-------------------|---|--------------|-----------|-------------------|--|----------------|---|---|---------|------|----------|---|----------|---|---|---------|------|-------|---|-------|---|
| IMCOS-4409-xyz | x | y | z | | | | | | | | | | | | | | | | | | |
| | <table><tr><th>Entries</th><th>Code</th></tr><tr><td>bell without lamp</td><td></td></tr><tr><td>bell with lamp</td><td>L</td></tr></table> | Entries | Code | bell without lamp | | bell with lamp | L | <table><tr><th>Entries</th><th>Code</th></tr><tr><td>110 V AC</td><td>1</td></tr><tr><td>220 V AC</td><td>2</td></tr></table> | Entries | Code | 110 V AC | 1 | 220 V AC | 2 | <table><tr><th>Entries</th><th>Code</th></tr><tr><td>50 Hz</td><td>5</td></tr><tr><td>60 Hz</td><td>6</td></tr></table> | Entries | Code | 50 Hz | 5 | 60 Hz | 6 |
| Entries | Code | | | | | | | | | | | | | | | | | | | | |
| bell without lamp | | | | | | | | | | | | | | | | | | | | | |
| bell with lamp | L | | | | | | | | | | | | | | | | | | | | |
| Entries | Code | | | | | | | | | | | | | | | | | | | | |
| 110 V AC | 1 | | | | | | | | | | | | | | | | | | | | |
| 220 V AC | 2 | | | | | | | | | | | | | | | | | | | | |
| Entries | Code | | | | | | | | | | | | | | | | | | | | |
| 50 Hz | 5 | | | | | | | | | | | | | | | | | | | | |
| 60 Hz | 6 | | | | | | | | | | | | | | | | | | | | |

All specifications, dimensions, weights and tolerances are nominal (typical) and Gitiessse reserve the right to vary all data without prior notice. No liability is accepted for any consequence of use.

IMCOS™ System is type approved by seven marine class societies.