

IMCOS-2132 Alarm unit for frigo cell call



Product description

IMCOS-2132 is a flush mounting alarm unit for Frigo Cells call application.

It is supplied with a buzzer and lighted indicator, 24 VDC powered.

The wall mounting version can replace the lamp with a lighted reset button as an option.


Features

- Different versions available:
 - flush mounting panel (IMCOS-2132);
 - wall mounting unit (IMCOS-2132-W);
 - wall mounting unit with reset button (IMCOS-2132-WR)
- Aluminium material,
 - black colour RAL 9005 (IMCOS-2132);
 - grey colour RAL 7001 (IMCOS-2132-W)


Specification

Material	Coated aluminium - black colour RAL 9005 (IMCOS-2132); - grey colour RAL 7001 (IMCOS-2132-Wy)
Mounting	- Flush mounting (IMCOS-2132); - Wall mounting (IMCOS-2132-Wy)
Wiring	Terminal strip on the back
Powering	24 V DC
Cable glands	1xPG29 (IMCOS-2132-Wy)
Dimensions	- Height 96 mm, width 96 mm, depth in console 110 mm (IMCOS-2132); - Height 122 mm, width 120 mm, depth in 81 mm (IMCOS-2132-Wy)
Weight	0,3 Kg (IMCOS-2132) 1,3 Kg (IMCOS-2132-Wy)

IMCOS-2132 Dimensions & fixing

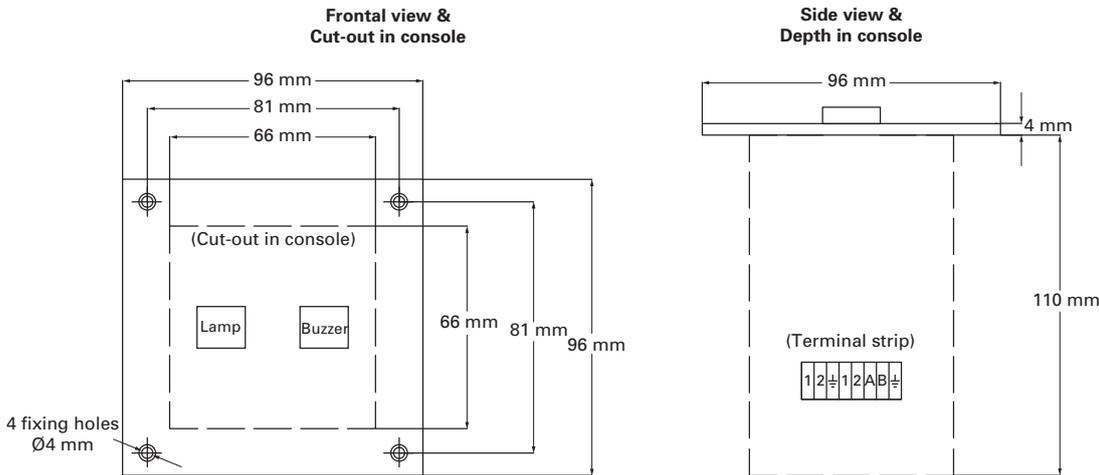

IMCOS-2132-W Dimensions & fixing

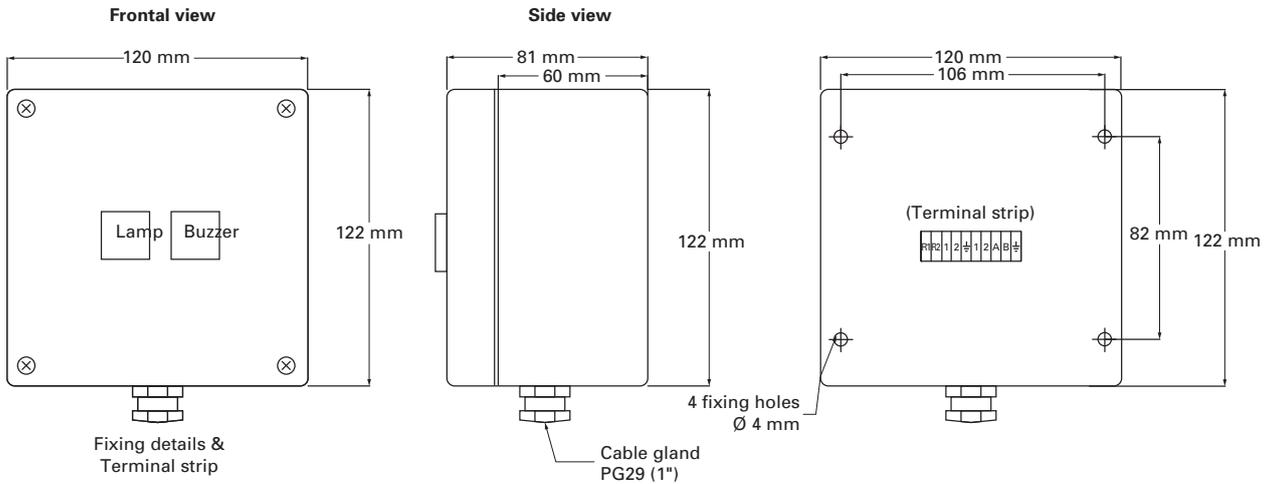

Ordering requirements

The following code is designed to help in selection of the correct unit. Build up the reference number by inserting the code for each component into the appropriate box.

Model	Mounting	Options
IMCOS-2132-xy	x	y
	Entries	Code
	flush mount	
	wall mount	W
	Entries	Code
	reset button	R

All specifications, dimensions, weights and tolerances are nominal (typical) and Gitiessse reserve the right to vary all data without prior notice. No liability is accepted for any consequence of use.

IMCOS™ System is type approved by seven marine class societies.