# IMCOS-2129 Watertight call box for frigo cell call system



## Product description

IMCOS-2129 is a call box for Frigo Cell call application with one lighted emergency push button.

### Features


- Aluminium material, grey colour RAL 7001
- Equipped with one lighted emergency push button and terminal strip inside
- Ingress Protection: IP44



#### Specification

Material	Coated aluminium – grey colour RAL 7001
Mounting	Wall mounting
Wiring	Terminal strip inside
Cable glands	1xPG29 (1") for inlet cable + 1xPG21 (3/4") for parallel connection
Powering	24 V DC
Dimensions	Height 122 mm, width 120 mm, depth 81 mm
Weight	1,3
Ingress protection	IP44

#### IMCOS-2129 Dimensions & fixing

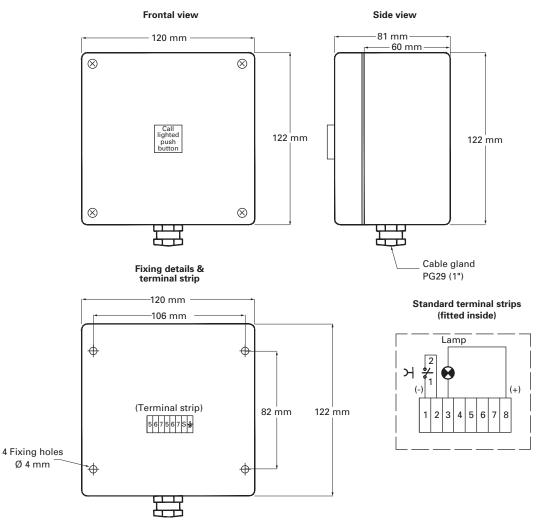

#### **Ordering requirements**

The following code is designed to help in selection of the correct unit. Build up the reference number by inserting the code for each component into the appropriate box.

Model IMC0S-2129

All specifications, dimensions, weights and tolerances are nominal (typical) and Gitiesse reserve the right to vary all data without prior notice. No liability is accepted for any consequence of use.

IMCOS<sup>™</sup> System is type approved by seven marine class societies.



© 2018 Eaton All Rights Reserved Printed in EMEA Reference No. DSIM0024A May 2018

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

