

OVER 25 YEARS
OF INNOVATION



\$ MILLIONS
SAVED

Trusted by
ASX & Fortune
500 Companies



Swivelpole™

LOWERING POLE SOLUTIONS

CATALOGUE 2025

EU/UK

STANDARD PRODUCT RANGE

ACCESS MADE EASY.



PROVIDING INNOVATIVE LOWERING POLE SOLUTIONS FOR LIGHTING AND
POLE MOUNTED EQUIPMENT FOR OVER 25 YEARS!

[SWIVELPOLE.COM](https://www.swivelpole.com)



SOLUTIONS FOR CONVERTING EXISTING HANDRAIL MOUNTED POLES TO LOWERING POLES AND COMPLETE POLES FOR NEW BUILDS.


PROBLEM



SOLUTION



CONTENTS



About Swivelpole™	4
Maxis™ joint features	6


RETROFIT SOLUTIONS 7

Retrofit Solutions - Standard Product Range	8
R1-Range Maxis™ joint only	9
R2-Range Maxis™ joint with pole top	10
Maxis™ joint with high vibration pole top	11
Pole Conversion Tool Kit (PCTK)	12



NEW BUILD SOLUTIONS 13

New Build Solutions - Standard Product Range	14
New Build Solutions - Standard Product Range with High Vibration Pole Tops (HVPT)	16
Stanchion or Stanchion & Structure Mounted	17
Structure Mounted	19
Horizontal Outreach (H-Series)	20
Column/Wall Mounted	21
Floor/Ground Mounted	23
High Vibration Pole Top (HVPT Series)	25



RELATED PRODUCTS

Mounting Bracket Kits	27
Luminaire Mounting Kits	29
Junction Box Plate Kits	31
Appendix: Technical Specifications	32



Swivelpole™

Swivelpole™ has been leading the way in innovative lowering pole solutions for lighting and pole-mounted equipment for over 25 years. Our advanced technology is trusted by top global companies in diverse and challenging environments. We are thrilled to announce that for the first time, our cutting-edge products are now available across Europe.

Experience the future of pole mounted solutions with Swivelpole™

Join the innovators who have already benefited from our advanced solutions. Discover how Swivelpole™ can enhance your operations and deliver lasting value.

“We have used Swivelpoles across multiple projects over the years, including mining, commercial, and industrial sites, and will continue to do so. Their extensive range of poles and mounting accessories meets all our needs.

Additionally, we are seeing a growing number of our clients specifically requesting Swivelpoles for their projects.”

**MARK ROWLEY
ELECTRICAL SUPERVISOR**

SOLUTIONS FOR ALL APPLICATIONS



LED Lighting



CCTV & Surveillance



Networking



Sirens & Alarms



Instruments & More




SAVE MILLIONS

Do the math - multiply your cost of access without a Swivelpole™ times the amount of poles you have.

DID YOU KNOW?


It's cheaper to install a Swivelpole™ than build a scaffold



SCAFFOLD



E.W.P.



LADDER



Swivelpole™





Swivelpole™

INCORPORATING

maxis°

The preferred lowering pole solution for safely accessing light fixtures and equipment.

- **Problem:** Poor lighting often leads to industrial accidents, and hard-to-reach fixtures make simple bulb changes risky and difficult.
- **Solution:** Swivelpole™ makes fixture maintenance, servicing, and upgrades easy and safe.
- **Feature:** The globally patented Maxis™ joint lets you lower and rotate fixtures to a safe working level in minutes - no ladders, scaffolding, or fall arrest systems needed.
- **Flexibility:** The Maxis™ joint can be built into new facilities or retrofitted into existing ones without welding or hot work permits.
- **Ease of Use:** Upgrading or changing lighting and pole mounted equipment is simple - just use a socket wrench to operate the Maxis™ joint.

Once installed, Swivelpole™ saves time and money, year after year.

BENEFITS



Cast steel joint with minimal moving parts



Suitable for hazardous locations & harsh environments



Multiple product configurations to suit a range of requirements



Superior 45° lowering pole technology



The only solution for converting existing rigid poles to lowering poles

RETROFIT SOLUTIONS


Convert rigid poles to lowering poles by installing a Maxis™ joint using the ingenious pole conversion tool kit (PCTK) without impact to existing wiring.

Upgrade to LED **without** using a ladder



Safely access any fixtures in seconds for fast and affordable inspection, maintenance and upgrades.

Swivelpole™ Standard Product Range - Retrofit Solutions

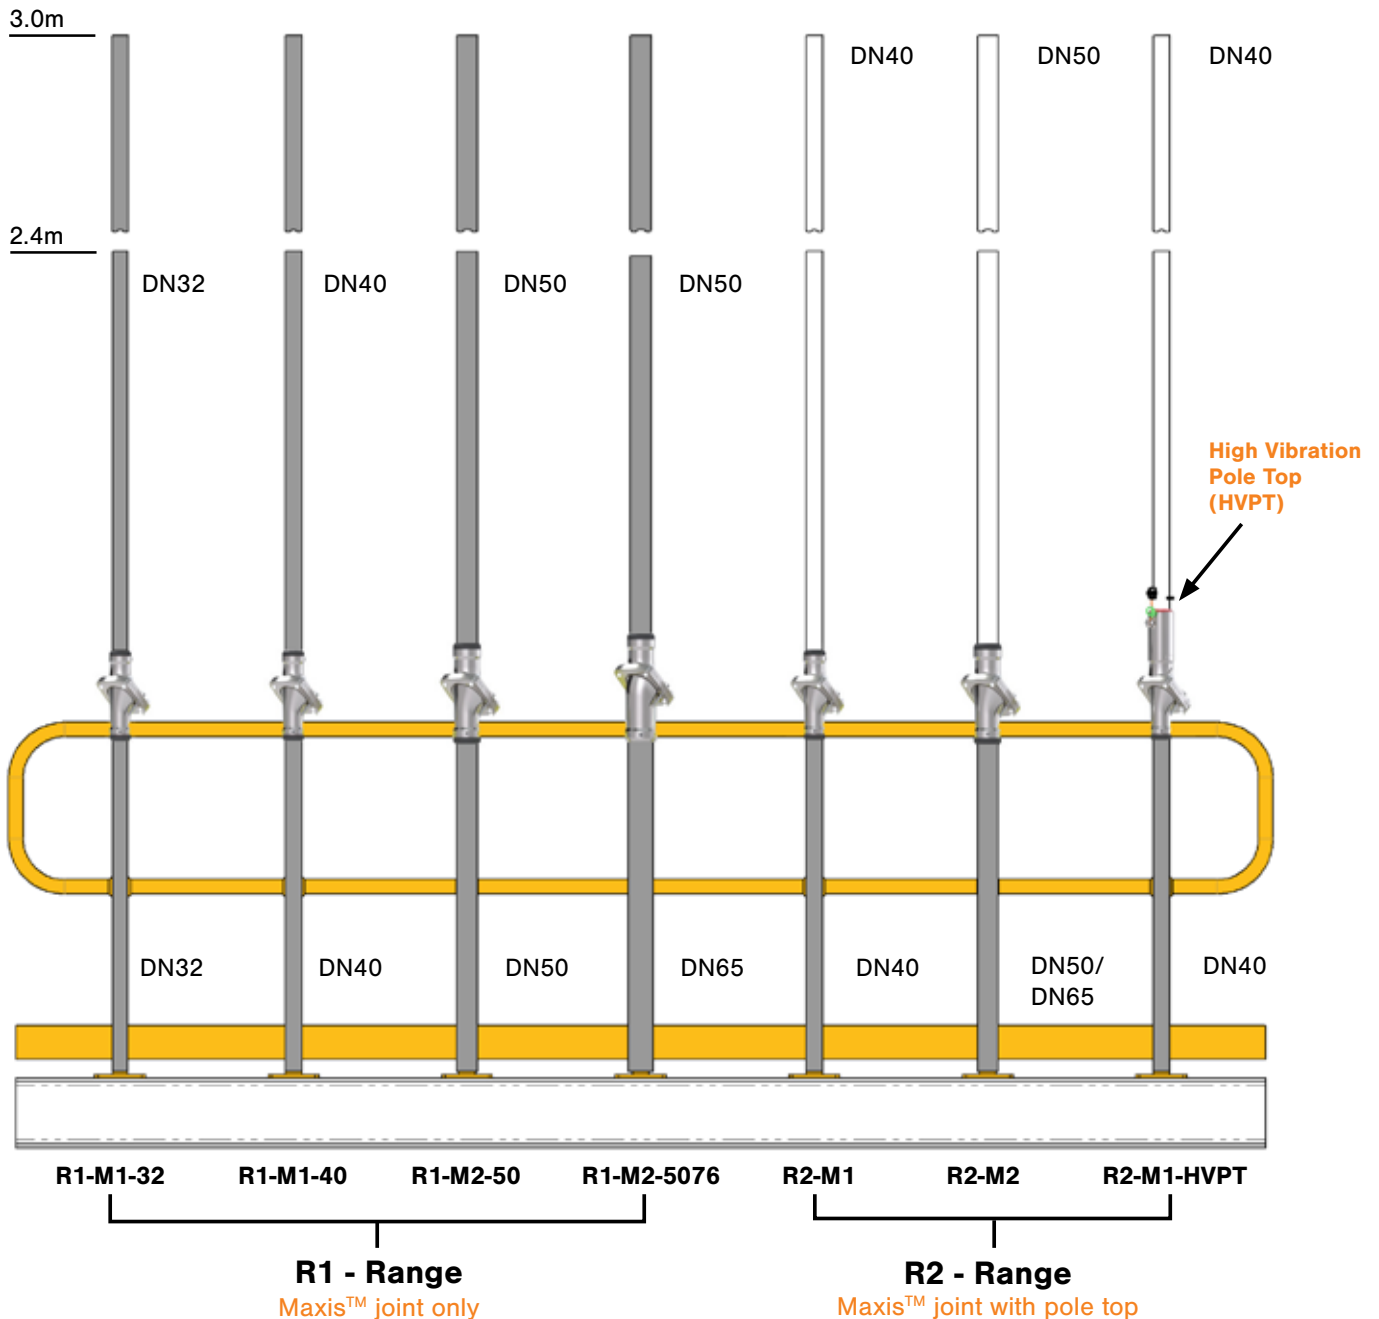

Swivelpole™ R1 - Range

Maxis™ joint only

Retrofit

New Build

R1 - Range - Maxis™ joint

Available in 4 sizes to suit various poles

Retrofit

Purchase the Swivelpole™ Maxis™ joint to convert rigid poles to lowering poles by installing a Maxis™ joint using the pole conversion tool kit (PCTK), see page 12.

New Build

Build a lowering pole by incorporating a Maxis™ joint into your design/structure using your own pipe.

R1 M1

R1 M2

DN 32

DN 50

DN 40

DN 50/65



ORDERING INFORMATION

Swivelpole™ R1 M1 & R1 M2

Suits pole size (DN)	Weight (kg)	Finish*	Maximum equipment (kg) by height				Product code
			2.4 m	3 m	4 m	5 m	
32	4.6	Hot-Dip Galvanized	20	15	-	-	R1-M1-32-HG
40	4.4	Hot-Dip Galvanized	20	20	-	-	R1-M1-40-HG
50	6.2	Hot-Dip Galvanized	20	20	15	10	R1-M2-50-HG
65	7.3	Hot-Dip-Galvanized	20	20	15	10	R1-M2-5076-HG
32	5.2	Stainless-Steel	20	15	-	-	R1-M1-32-SS
40	4.7	Stainless-Steel	20	20	-	-	R1-M1-40-SS
50	6.6	Stainless-Steel	20	20	15	10	R1-M2-50-SS
65	7.3	Stainless-Steel	20	20	15	10	R1-M2-5076-SS

HG - Hot-dip Galvanised SS - Stainless Steel All dimensions are nominal, in metric sizes

Swivelpole™ R2 - Range

Maxis™ joint with pole top

Retrofit

2.4 - 3m

R2 - Range - Maxis™ joint with pole top

Available in 2 sizes to suit various poles

Retrofit

Purchase the Swivelpole™ Maxis™ joint with pole top to convert rigid poles to lowering poles by installing a Maxis™ joint using the pole conversion tool kit (PCTK), see page 12.

Related products

For optional accessories, see pages 27-31.



R2 M1

R2 M2

Top
DN 40
Plain

Top
DN 50
Plain

ORDERING INFORMATION

Swivelpole™ R2-M1 & R2-M2

Suits pole size (DN)	Installed height	Weight (kg)	Pole top finish	Product code
40	2.4m	8.9	HG	R2-M1-40-2400-P-HG
40	3.0m	10.6	HG	R2-M1-40-3000-P-HG
40	2.4m	9.9	SS	R2-M1-40-2400-P-SS
40	3.0m	11.9	SS	R2-M1-40-3000-P-SS
40	2.4m	6.5	AL	R2-M1-40-2400-P-AL
40	3.0m	7.4	AL	R2-M1-40-3000-P-AL
50	2.4m	12.2	HG	R2-M2-50-2400-P-HG
50	3.0m	15.2	HG	R2-M2-50-3000-P-HG
50	2.4m	13.3	SS	R2-M2-50-2400-P-SS
50	3.0m	16.6	SS	R2-M2-50-3000-P-SS
50	2.4m	9.9	AL	R2-M2-50-2400-P-AL
50	3.0m	11.7	AL	R2-M2-50-3000-P-AL

HG - Hot-dip Galvanised SS - Stainless Steel AL - Aluminium All dimensions are nominal, in metric sizes

Swivelpole™ R2 M1 HVPT

Maxis™ joint with High Vibration Pole Top (HVPT)

Retrofit

2.4 - 3m

R2 M1 HVPT

Top

DN 40

Plain



Withstand extreme vibration with a High Vibration Pole Top.

Retrofit

Convert rigid poles to lowering poles by installing a Maxis Joint and renewing the pole top using the pole conversion tool kit (PCTK), see page 12.

Industries

Ideal for use in industries such as mining, autonomous vehicle operations, and industrial areas with intense vibration, the Swivelpole™ HVPT range ensures reliability, durability, and extended service life for pole-mounted equipment..

Related products

For optional accessories, see pages 27-31.

ORDERING INFORMATION

Swivelpole™ R2-M1 HVPT

Suites pole size (DN)	Installed height	Weight (kg)	Pole top finish	Product code
40	2.4m	10.0	HG	R2-M1-HVPT-40-2400-P-001-HG
40	3.0m	11.8	HG	R2-M1-HVPT-40-3000-P-001-HG

HG - Hot-dip Galvanised All dimensions are nominal, in metric sizes

Swivelpole™ PCTK

Pole Conversion Tool Kit (PCTK)

Retrofit

Convert rigid poles to lowering poles by installing a Maxis™ joint using the Swivelpole™ Pole Conversion Tool Kit.

Simple conversion process without impact to existing wiring or design intent. All work takes place at walkway level, eliminating the risks of working at heights. There is no need for hot work permits.



ORDERING INFORMATION

Swivelpole™ PCTK


Suits Pole Sizes		Kit includes		Product code
DN	OD			
32	42.2mm	Pole conversion tool	Spare blades	PCTK-01
40	48.3mm	Ratchet pipe cutter	Socket wrench	
50	60.3mm	Marking tool	Cutting Oil, Riggers bag	

All dimensions are nominal.

NEW BUILD SOLUTIONS

An entire lowering pole with optional accessories such as mounting brackets, luminaire mounts and junction box plates.

COMPLETE/FULL POLE SOLUTION - OVERVIEW

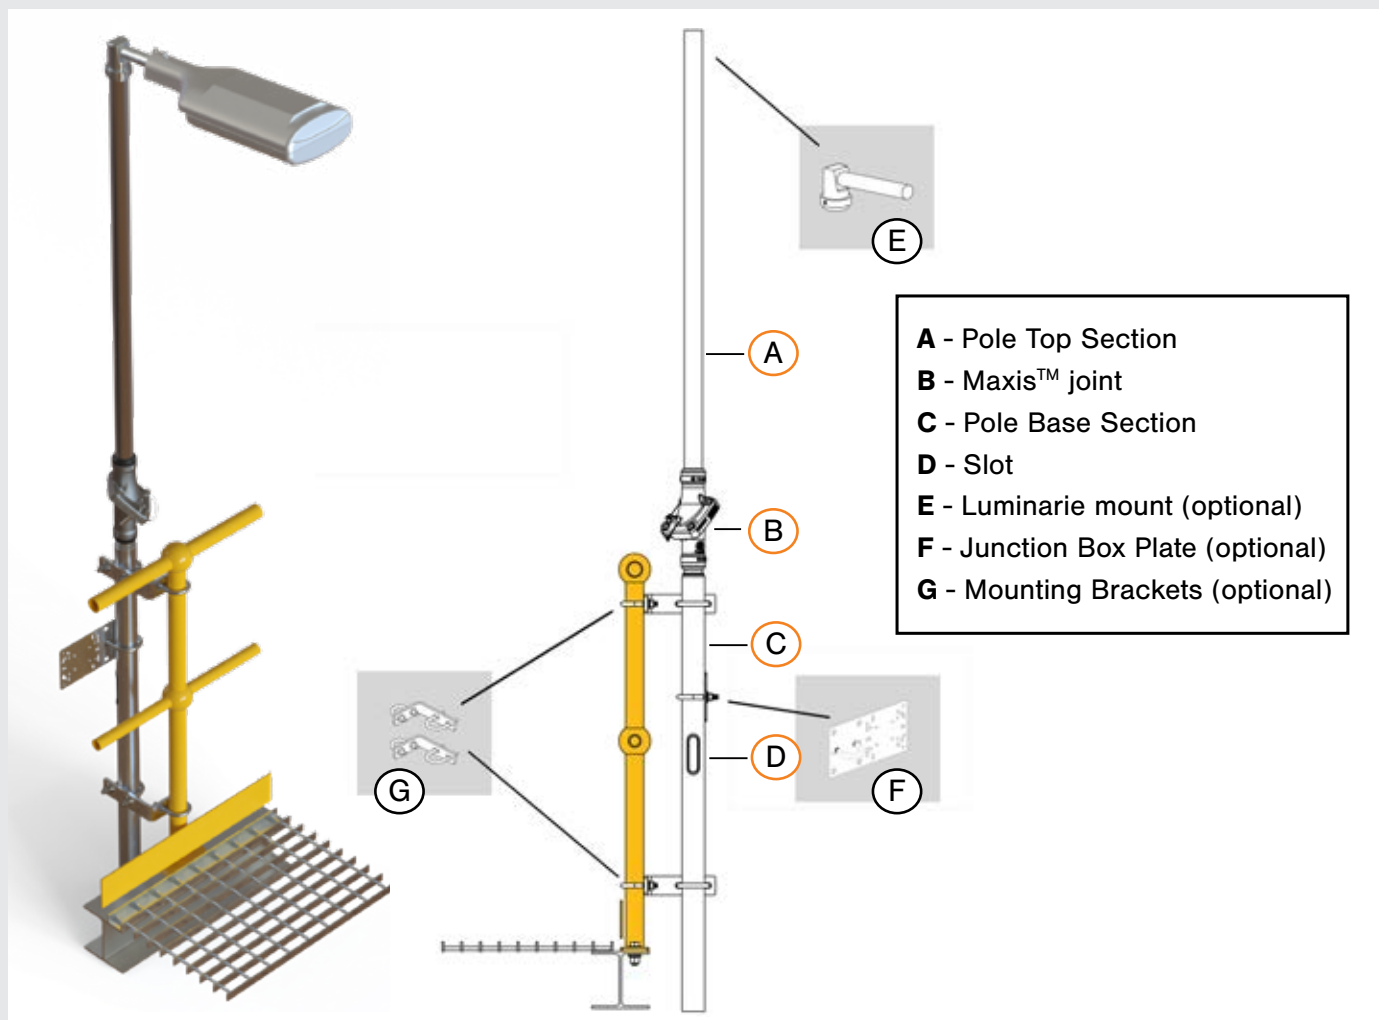

INDUSTRIES



Mining & Metals



Oil & Gas
Onshore & Offshore



Power Generation



Water & Waste



Infrastructure



Food & Beverage



Chemicals




Renewables




Fertiliser

Swivelpole™ Standard Product Range - New Build Solutions

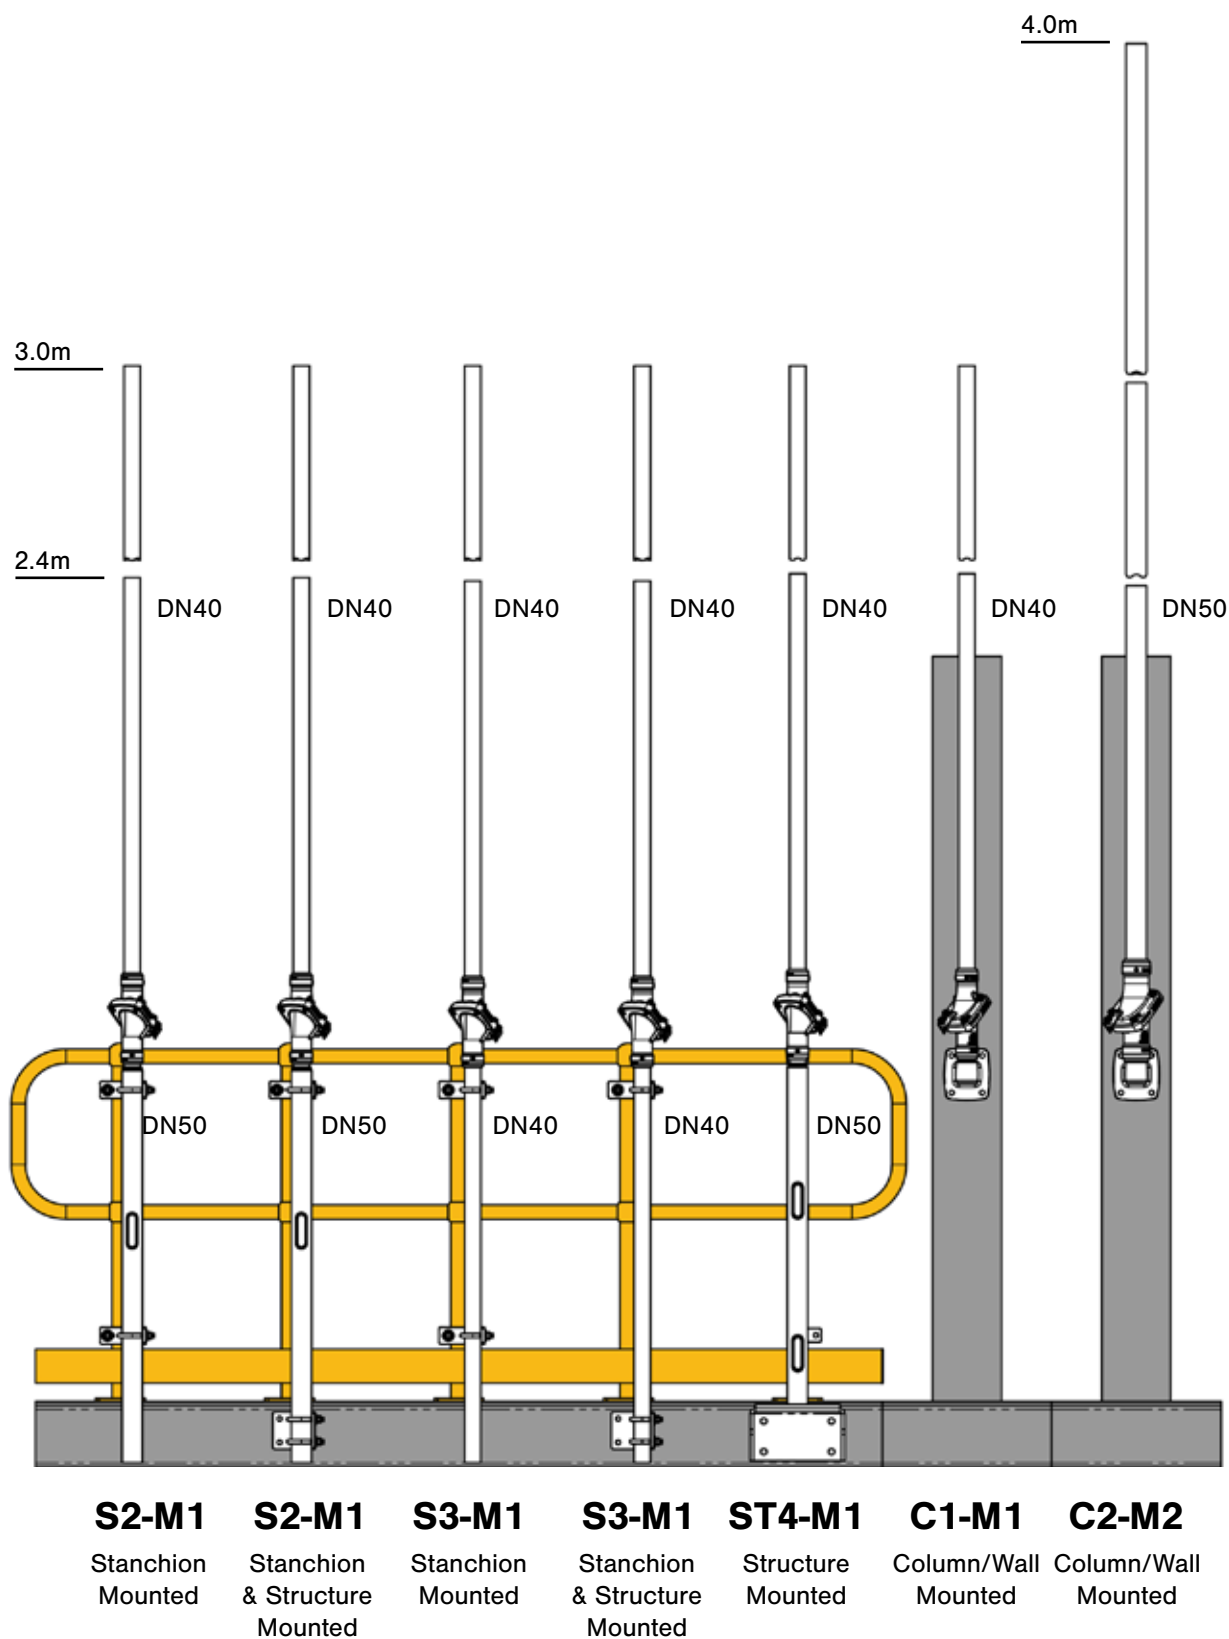


Swivelpole™ Standard Product Range - New Build Solutions

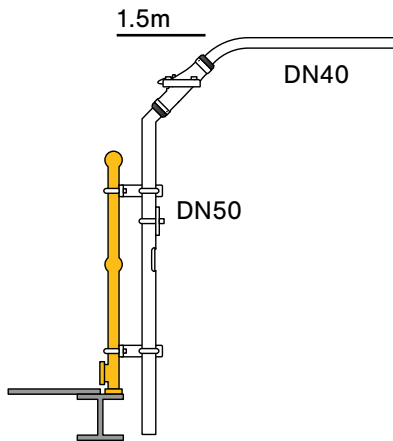

H2-M1

Stanchion or Stanchion &
Structure Mounted


Horizontal Outreach

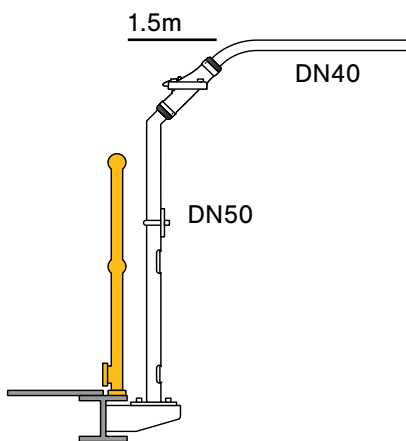

HST4-M1

Structure Mounted

Horizontal Outreach

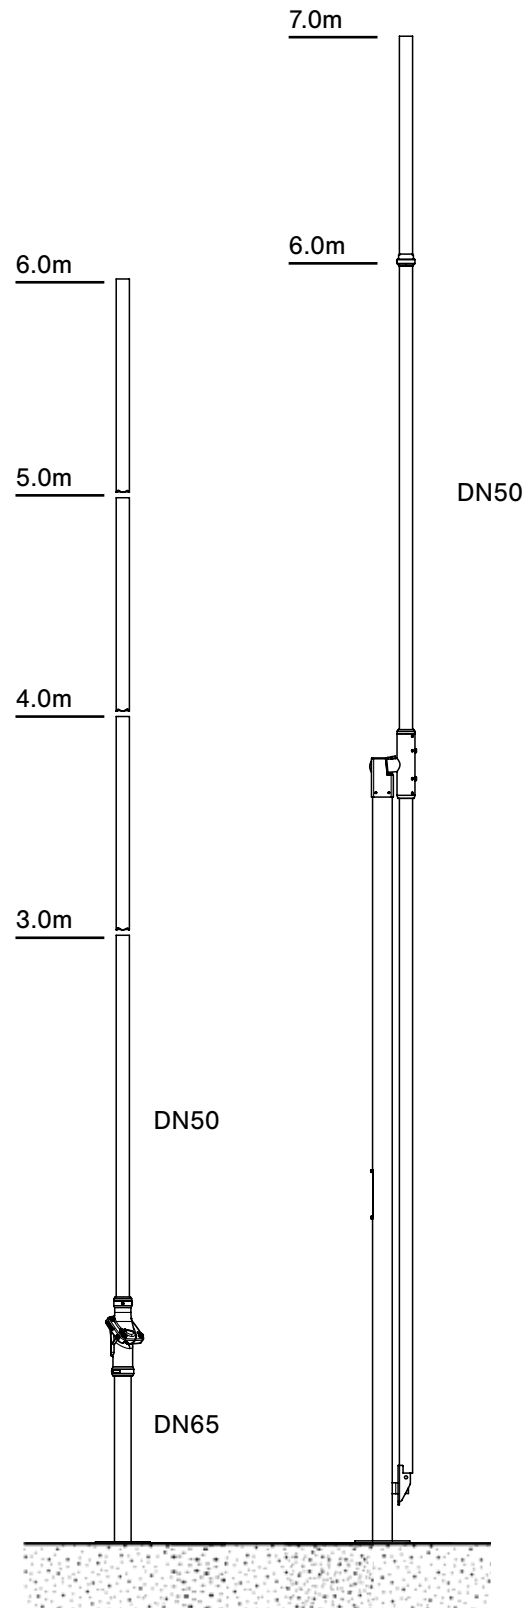


F7-M2

Giraffe Pole™ G5

Floor/Ground Mounted

Swivelpole™ Standard Product Range - New Build Solutions with High Vibration Pole Tops (HVPT)

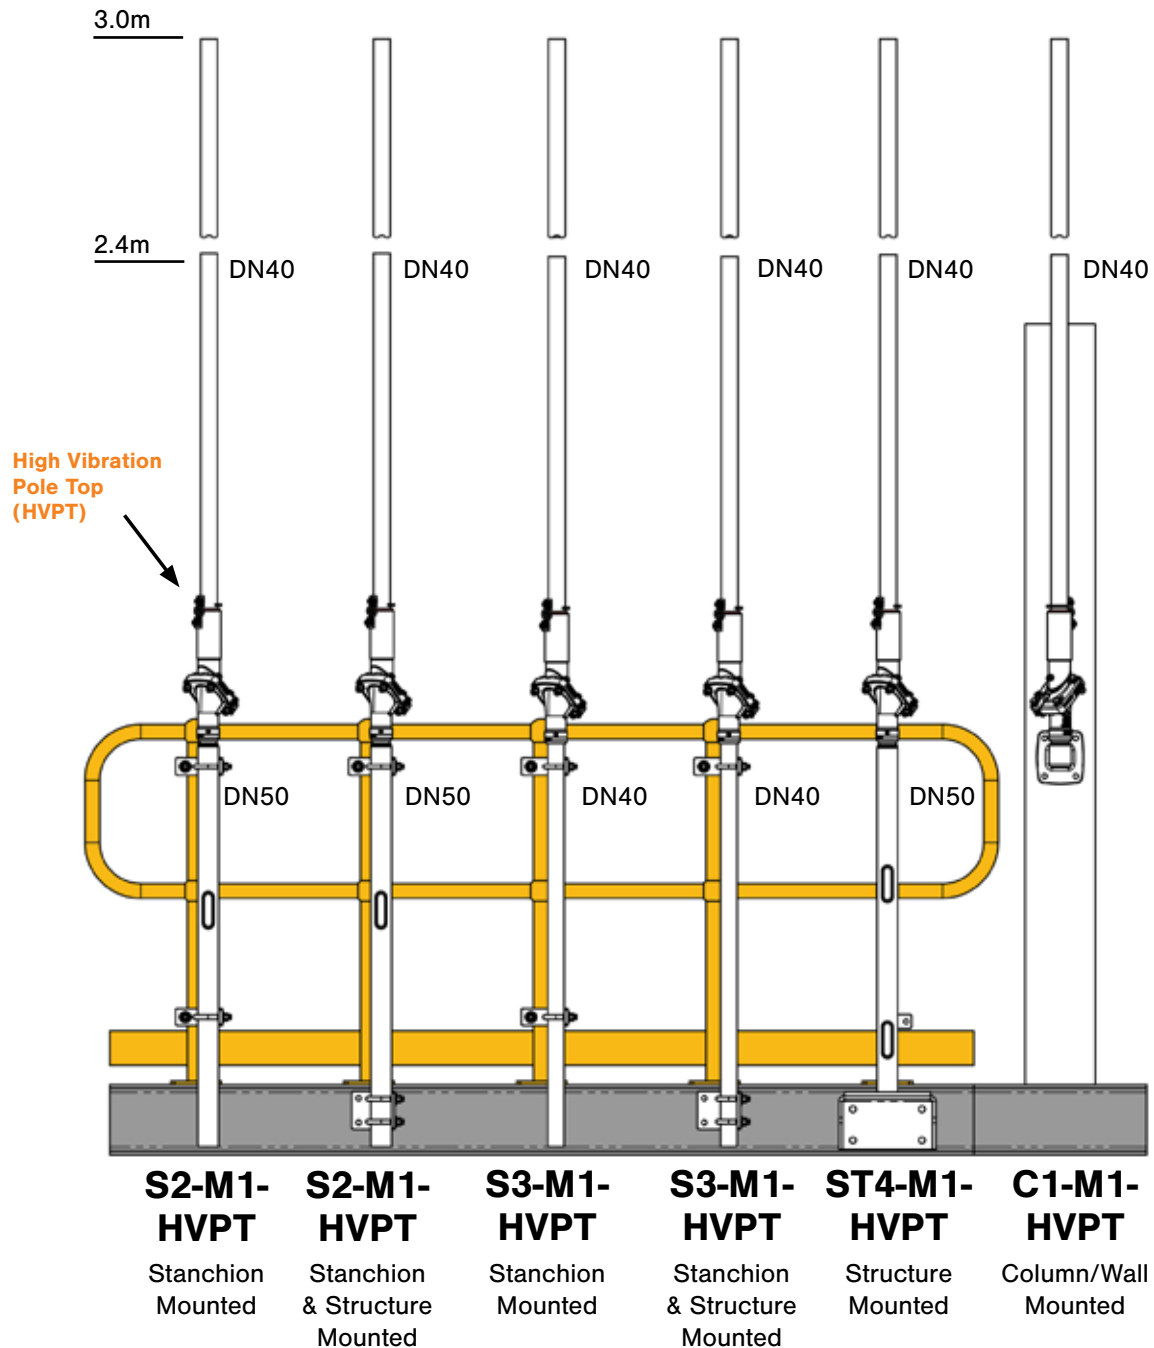

Swivelpole™ S2 M1

Stanchion or Stanchion &
Structure Mounted

New Build

2.4 – 3m

S2 M1

Top

DN40

Plain

Base

DN50

Slotted


**Designed for installation in
accordance with IEC standards**

Applications

Ideal for lighting on walkways, platforms,
stairways, and conveyors.

Related products

For optional accessories, see pages 27-31.

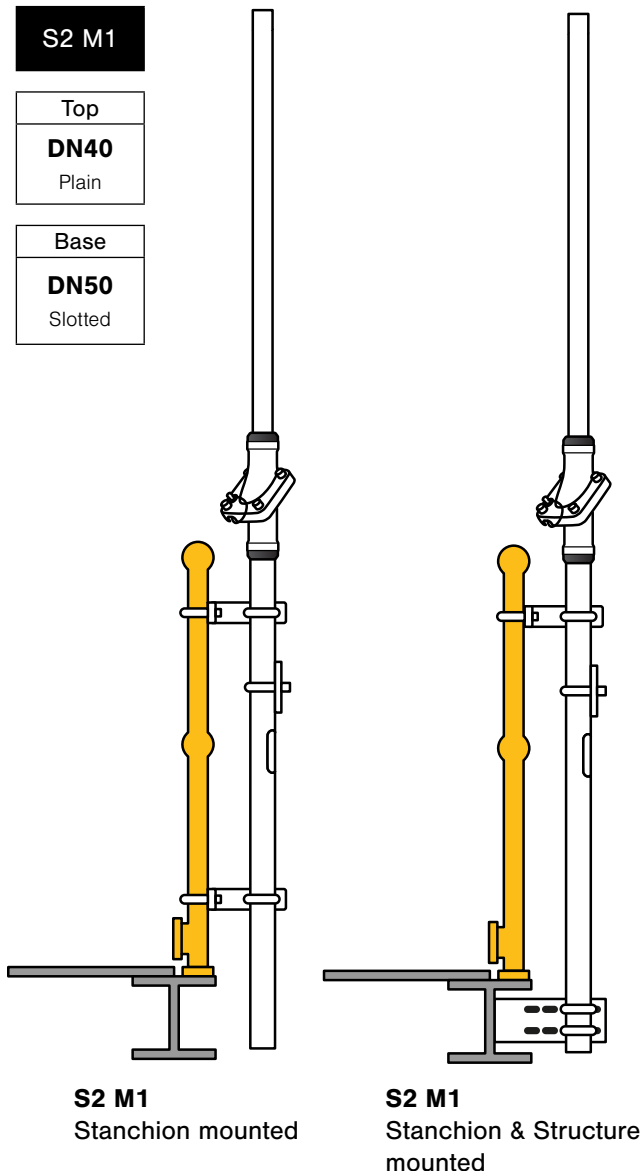

S2 M1
Stanchion mounted

S2 M1
Stanchion & Structure
mounted

ORDERING INFORMATION

Swivelpole™ S2 M1

Installed height	Weight (kg)	Pole top/base finish	Product code
2.4m	15.2	HG	S2-M1-2400-P-HG
3.0m	17.0	HG	S2-M1-3000-P-HG
2.4m	16.8	SS	S2-M1-2400-P-SS
3.0m	18.9	SS	S2-M1-3000-P-SS

HG - Hot-dip Galvanised SS - Stainless Steel All dimensions are nominal, in metric sizes

Swivelpole™ S3 M1

Stanchion or Stanchion & Structure Mounted

New Build

2.4 – 3m

S3 M1

Top


DN40

Plain

Base

DN40

Plain

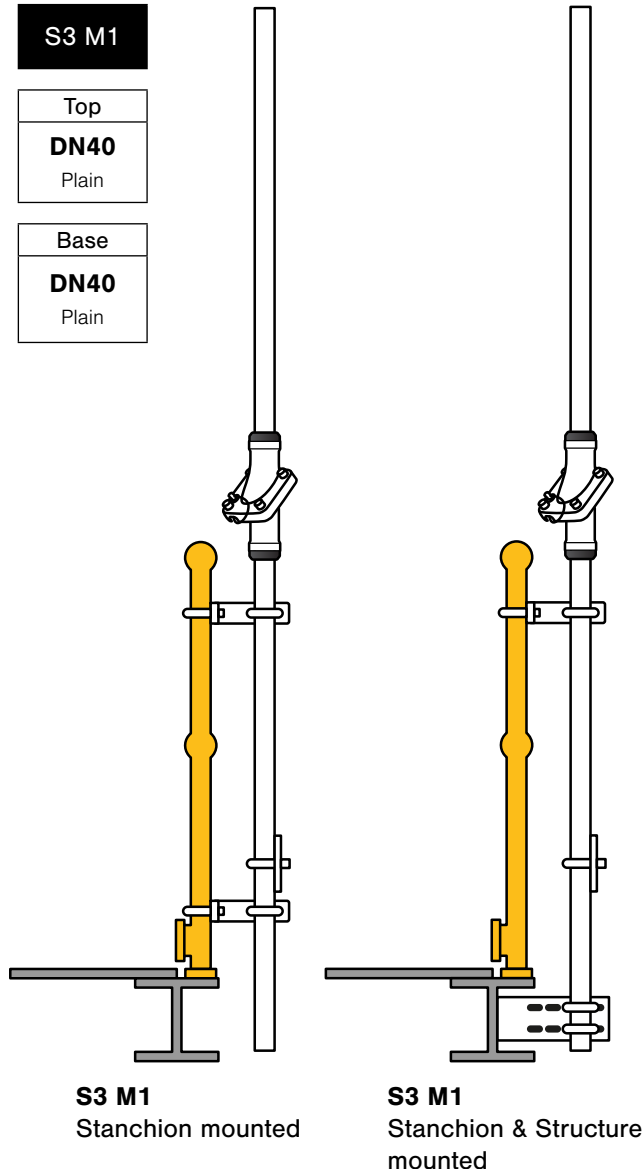

Designed for installation in accordance with IEC standards

Aluminium Option

Light weight - reduced weight on stanchion, corrosion free and cost effective.

Applications

Ideal for lighting on walkways, platforms, stairways, and conveyors.

Related products

For optional accessories, see pages 27-31.

ORDERING INFORMATION

Swivelpole™ S3 M1

Installed height	Weight (kg)	Pole top/base finish	Product code
2.4m	13.3	HG	S3-M1-2400-P-003-HG
3.0m	15.0	HG	S3-M1-3000-P-003-HG
2.4m	8.6	AL	S3-M1-2400-P-003-AL
3.0m	9.4	AL	S3-M1-3000-P-003-AL
2.4m	15.1	SS	S3-M1-2400-P-003-SS
3.0m	17.1	SS	S3-M1-3000-P-003-SS

HG - Hot-dip Galvanised SS - Stainless Steel AL - Aluminium All dimensions are nominal, in metric sizes

Swivelpole™ ST4 M1

Structure Mounted


New Build

2.4 – 3m

ST4 M1

Top
DN40
Plain

Base
DN50
Slotted

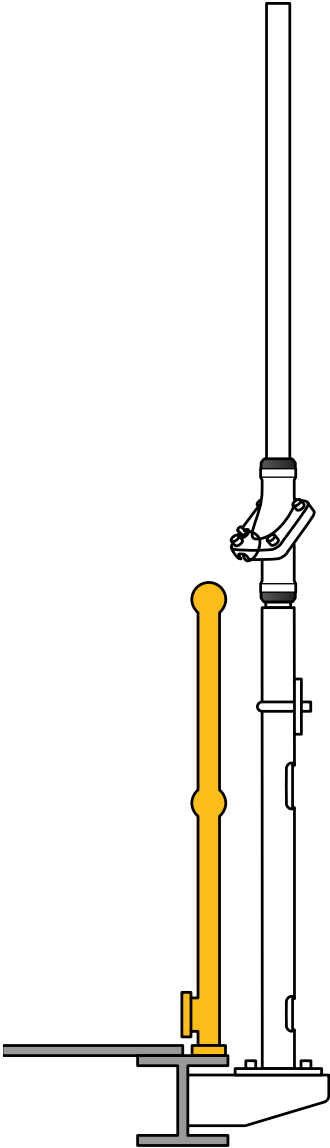

ST4 M1
Structure mounted

Designed for installation in accordance with IEC standards

Applications

Ideal for lighting on walkways, platforms, stairways, and conveyors.

Related products

For optional accessories, see pages 27-31.

ORDERING INFORMATION

Swivelpole™ ST4 M1

Installed height	Weight (kg)	Pole top/base finish	Product code
2.4m	21.1	HG	ST4-M1-2400-P-HG
3.0m	22.8	HG	ST4-M1-3000-P-HG
2.4m	22.5	SS	ST4-M1-2400-P-SS
3.0m	24.5	SS	ST4-M1-3000-P-SS

HG - Hot-dip Galvanised SS - Stainless Steel All dimensions are nominal, in metric sizes

Swivelpole™ H – Series

Horizontal Outreach - Stanchion,
Stanchion & Structure, or Structure Mounted

New Build

1.5m

H2 M1

Top
DN 40
Plain

Base
DN 50
Slotted

HST4 M1

Top
DN 40
Plain

Base
DN 50
Slotted


Designed for installation in
accordance with IEC standards

Applications

Ideal for lighting outside guardrails and below
walkways.

Related products

For optional accessories, see pages 27-31.

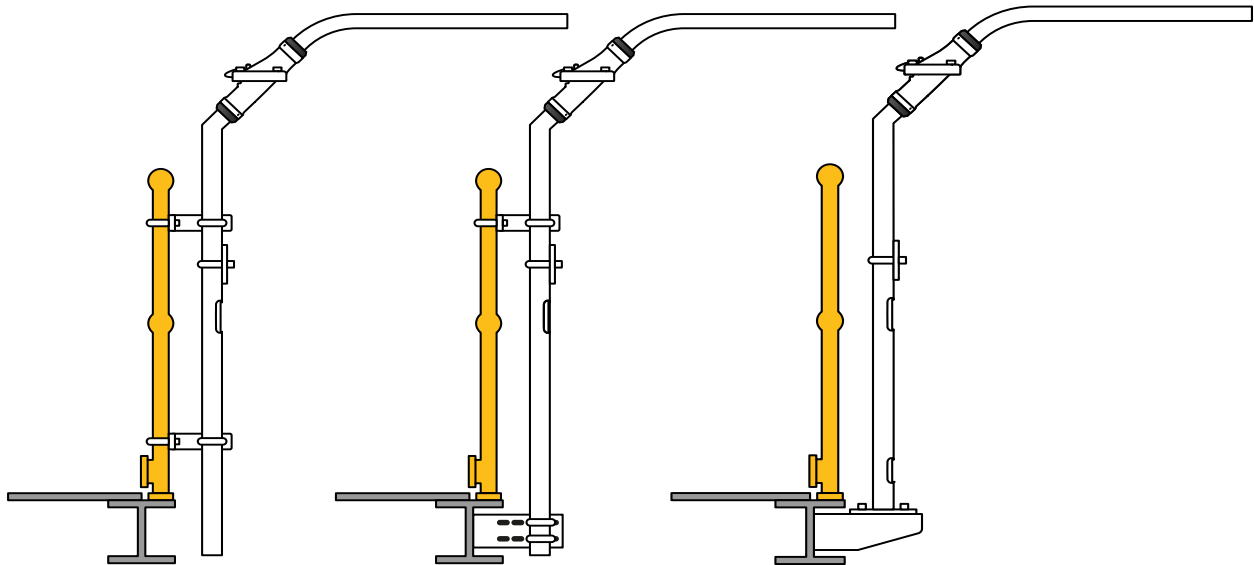

H2 M1

Stanchion mounted

H2 M1

Stanchion & Structure
mounted

HST4 M1

Structure mounted

ORDERING INFORMATION

Swivelpole™ H-Series

Installed height	Weight (kg)	Pole top/base finish	Product code
1.5m	15.3	HG	H2-M1-1500-10-P-HG
1.5m	16.9	SS	H2-M1-1500-10-P-SS
1.5m	21.8	HG	HST4-M1-1500-10-P-HG
1.5m	21.8	SS	HST4-M1-1500-10-P-SS

HG - Hot-dip Galvanised SS - Stainless Steel All dimensions are nominal, in metric sizes

Swivelpole™ C1 M1

Column/Wall mounted

New Build


2.4 – 3m

C1 M1

Top

DN40

Plain

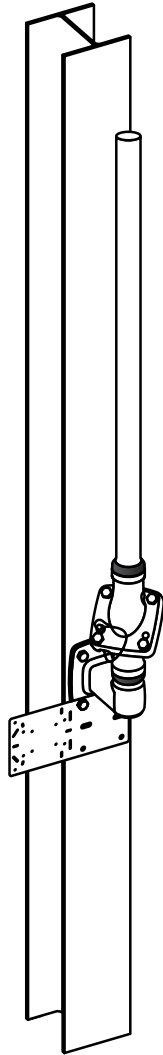

Designed for installation in accordance with IEC standards

Applications

Ideal for internal structure lighting, area lighting and sub-station walls

Related products

For optional accessories, see pages 27-31.

ORDERING INFORMATION

Swivelpole™ C1 M1

Installed height	Weight (kg)	Pole top finish	Product code
2.4m	13.1	HG	C1-M1-2400-P-HG
3.0m	14.9	HG	C1-M1-3000-P-HG
2.4m	13.7	SS	C1-M1-2400-P-SS
3.0m	15.8	SS	C1-M1-3000-P-SS
2.4m	10.8	AL	C1-M1-2400-P-HG-AL
3.0m	11.6	AL	C1-M1-3000-P-HG-AL

HG - Hot-dip Galvanised SS - Stainless Steel AL - Aluminium All dimensions are nominal, in metric sizes

Swivelpole™ C2 M2

Column/Wall mounted

New Build


2.4 – 4m

C2 M2

Top

DN50

Plain

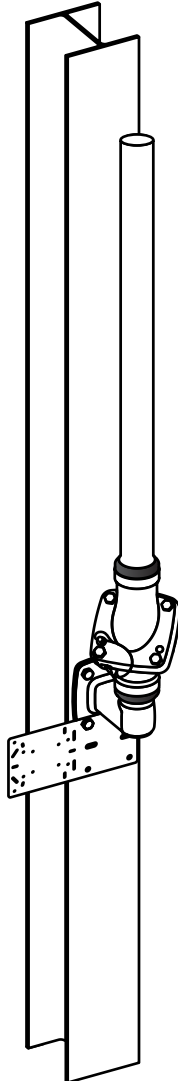

Designed for installation in accordance with IEC standards

Applications

Ideal for internal structure lighting, area lighting and sub-station walls

Important information

2 person operation is recommended for poles over 3 metres.

Related products

For optional accessories, see pages 27-31.

ORDERING INFORMATION

Swivelpole™ C2 M2

Installed height	Weight (kg)	Pole top finish	Product code
2.4m	16.7	HG	C2-M2-2400-P-HG
3.0m	19.7	HG	C2-M2-3000-P-HG
4.0m	24.7	HG	C2-M2-4000-P-HG
2.4m	18.1	SS	C2-M2-2400-P-SS
3.0m	21.3	SS	C2-M2-3000-P-SS
4.0m	26.7	SS	C2-M2-4000-P-SS
2.4m	13.2	AL	C2-M2-2400-P-HG-AL
3.0m	14.5	AL	C2-M2-3000-P-HG-AL
4.0m	16.6	AL	C2-M2-4000-P-HG-AL

HG - Hot-dip Galvanised SS - Stainless Steel AL - Aluminium All dimensions are nominal, in metric sizes

Swivelpole™ F7 M2

Floor/Ground Mounted

New Build

3 – 6m

F7 M2

Top


DN 50

Plain

Base

DN 65

Plain

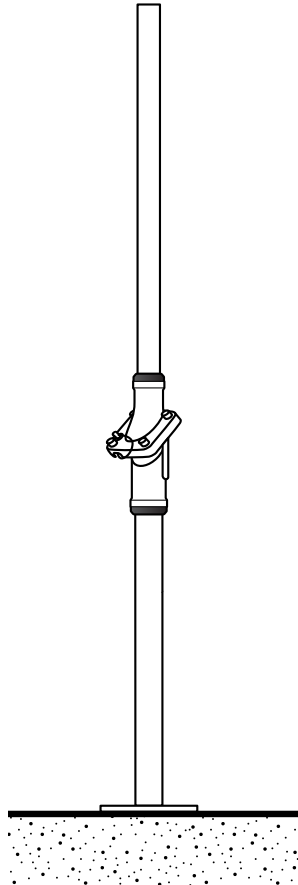

Versatile lowering pole solution for light-weight fixtures and equipment.

Applications

Ideal for accommodation camps and villages, parks, pathways, car parks, tennis courts, railway platforms and public lighting.

Details

Access panel located at back of Maxis joint - for connecting cables.

Footings

Site engineers are responsible for the design, approval, and installation of footings and foundations.

Related products

For optional accessories, see pages 27-31.

ORDERING INFORMATION

Swivelpole™ F7 M2

Installed height	Weight (kg)	Pole top/base finish	Product code
3.0m	24.2	HG	F7-M2-3000-P-HG
4.0m	28.3	HG	F7-M2-4000-P-HG
5.0m	32.4	HG	F7-M2-5000-P-HG
6.0m	36.5	HG	F7-M2-6000-P-HG
3.0m	16.6	AL	F7-M2-3000-P-AL
4.0m	18.7	AL	F7-M2-4000-P-AL
5.0m	20.9	AL	F7-M2-5000-P-AL
6.0m	23.0	AL	F7-M2-6000-P-AL

HG - Hot-dip Galvanised AL - Aluminium All dimensions are nominal, in metric sizes

Giraffe Pole™ G5

Floor/Ground Mounted

New Build

6 – 7m

G5

Top

DN 50

Plain

Base

SHS 89

Access Panel

30 KG
DN 50



SINGLE PLANE
OPERATION

A medium-duty solution for mounting equipment at heights up to 7 metres.

Applications

Ideal for roadways, pathways, accommodation villages, schools, universities, prisons, car parks, retirement villages and tennis courts.

Details


Locking mechanism with padlock facility and access panel at convenient height.

Footings

Site engineers are responsible for the design, approval, and installation of footings and foundations.

Related products

For optional accessories, see pages 27-31.

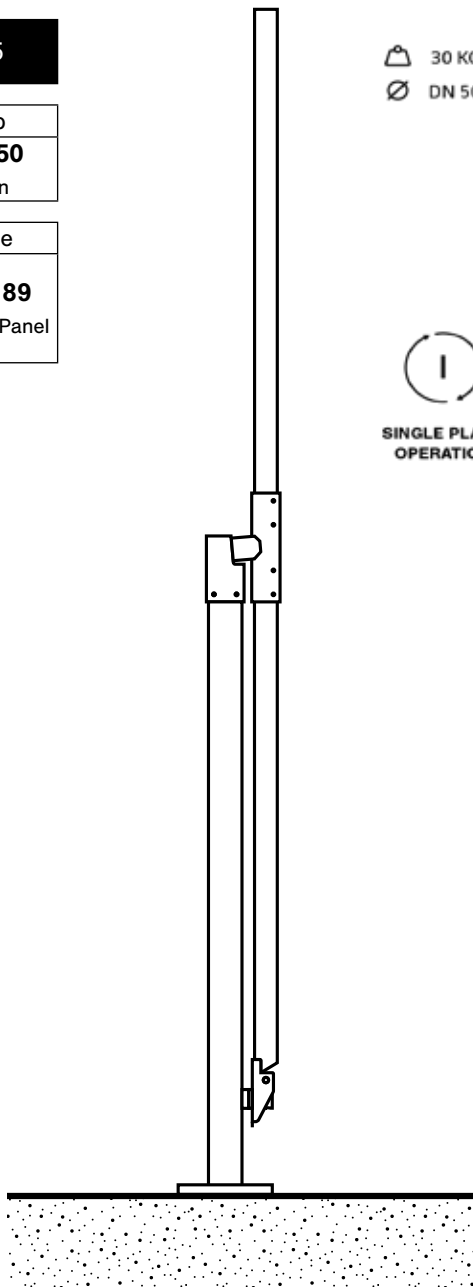

ORDERING INFORMATION

Swivelpole™ G5

Installed height	Weight (kg)	Pole top/base finish	Product code
4.0m	58.1	HG	G5-4000-P-HG
5.0m	62.6	HG	G5-5000-P-HG
6.0m	78.3	HG	G5-6000-P-HG
7.0m	92.8	HG	G5-7000-P-HG


HG - Hot-dip Galvanised All dimensions are nominal, in metric sizes

Swivelpole™ HVPT Series

Withstand extreme vibration with a High Vibration Pole Top (HVPT)

New Build

2.4 – 3m

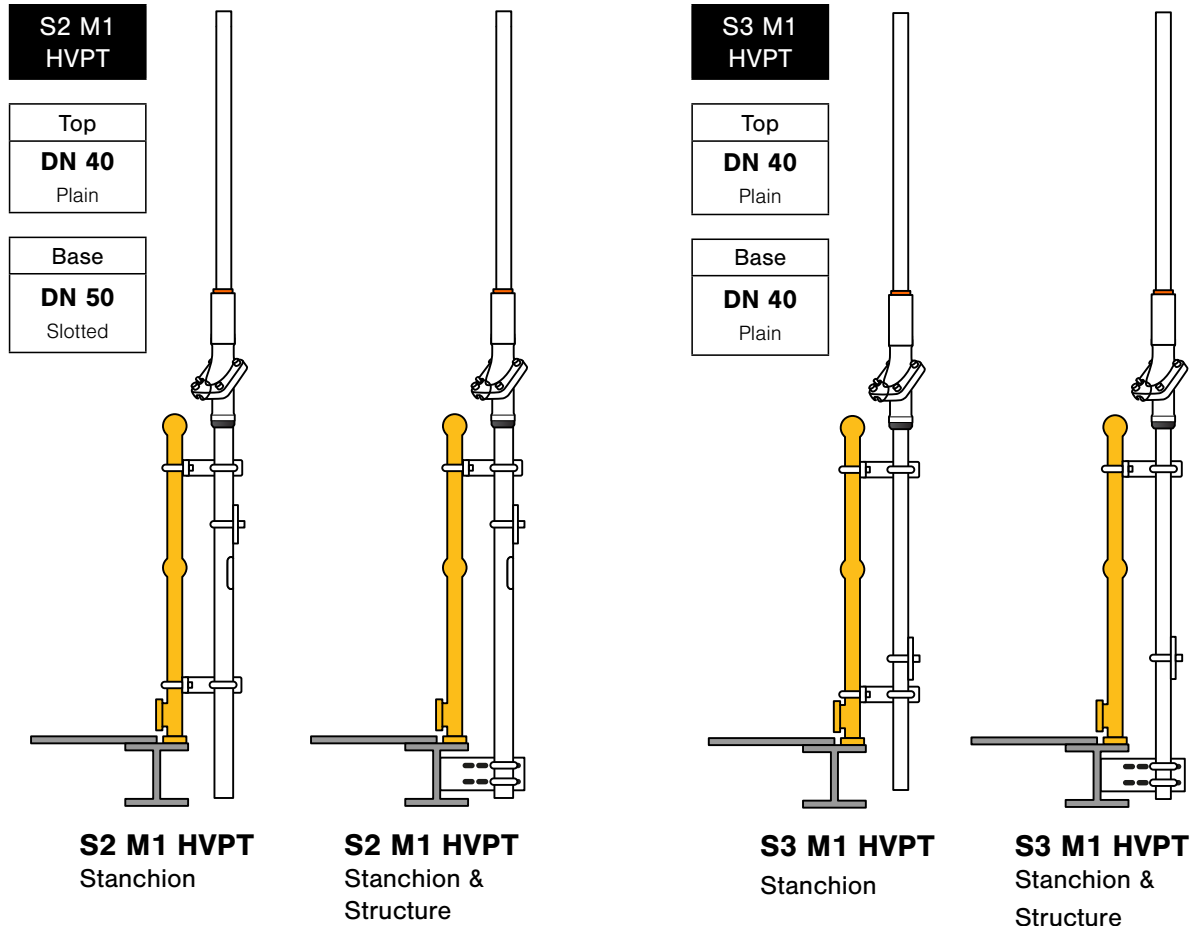

Related products

For optional accessories, see pages 27-31.

ORDERING INFORMATION

Swivelpole™ HVPT Series

Installed height	Weight (kg)	Pole top/base finish	Product code
2.4m	16.4	HG	S2-M1-HVPT-2400-P-001-HG
3.0m	18.1	HG	S2-M1-HVPT-3000-P-001-HG
2.4m	14.5	HG	S3-M1-HVPT-2400-P-013-HG
3.0m	16.2	HG	S3-M1-HVPT-3000-P-013-HG
2.4m	12.1	AL	S3-M1-HVPT-2400-P-013-HG-AL
3.0m	13.0	AL	S3-M1-HVPT-3000-P-013-HG-AL

HG - Hot-dip Galvanised AL - Aluminium All dimensions are nominal, in metric sizes

Swivelpole™ HVPT Series

Withstand extreme vibration with a High Vibration Pole Top (HVPT)

New Build

2.4 – 3m

ST4 M1
HVPT

Top


DN 40

Plain

Base

DN 50

Slotted

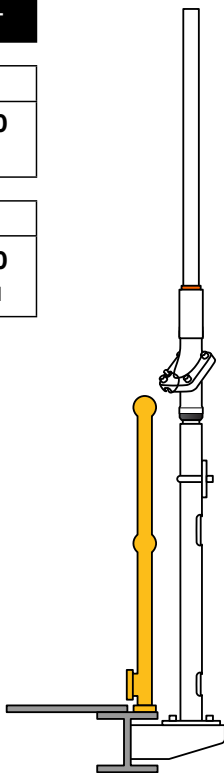


ST4 M1 HVPT
Structure

C1 M1
HVPT

Top

DN 40

Plain



C1 M1 HVPT
Column/Wall Mounted

Related products

For optional accessories, see pages 27-31.

ORDERING INFORMATION

Swivelpole™ HVPT Series

Installed height	Weight (kg)	Pole top/base finish	Product code
2.4m	22.2	HG	ST4-M1-HVPT-2400-P-001-HG
3.0m	24.0	HG	ST4-M1-HVPT-3000-P-001-HG
2.4m	14.3	HG	C1-M1-HVPT-2400-P-001-HG
3.0m	16.1	HG	C1-M1-HVPT-3000-P-001-HG
2.4m	11.9	AL	C1-M1-HVPT-2400-P-001-HG-AL
3.0m	12.8	AL	C1-M1-HVPT-3000-P-001-HG-AL

HG - Hot-dip Galvanised AL - Aluminium All dimensions are nominal, in metric sizes

Swivelpole™ Accessories


Mounting Bracket Kits

Kit includes brackets and fasteners.

Suits **Stanchion Mounted Models**


S3 M1

S3 M1 HVPT



MBK2-2-40

U-Bolt to stanchion



MBK6-6-40


Clamp to stanchion

Suits **Stanchion Mounted Models**

S2 M1


H2 M1

S2 M1 HVPT



MBK2-2-50

U-Bolt to stanchion




MBK6-6-50

Clamp to stanchion

Suits **Structure Mounted Models**

HST4 M1

ST4 M1



MBK9-002

Bolt to structure


Mounting Bracket Kits

Kit includes brackets and fasteners.

Suits Stanchion & Structure Mounted Models


S3 M1

S3 M1 HVPT




MBK2-5-40

U-Bolt to stanchion
& Bolt to structure




MBK2-5A-40

U-Bolt to stanchion
& Bolt to *offset* structure



MBK6-5-40

Clamp to stanchion
& Bolt to structure



MBK6-5A-40


Clamp to stanchion
& Bolt to *offset* stanchion

Suits Stanchion & Structure Mounted Models

S2 M1


H2 M1

S2 M1 HVPT




MBK2-5-50

U-Bolt to stanchion & Bolt
to structure




MBK2-5A-50

U-Bolt to stanchion & Bolt
to *offset* structure



MBK6-5-50

Clamp to stanchion &
Bolt to structure




MBK6-5A-50

Clamp to stanchion &
Bolt to *offset* structure


Luminaire Mounting Kits

Suits DN40 and DN50 pole tops.

Linear · LED · Bulkhead · Other




LMK1101




LMK2101


Linear



LMK2304



LMK2301




LMK2302

Luminaire Mounting Kits


Suits DN40 and DN50 pole tops.

Universal - CCTV

Suits DN40, DN50 and DN65 pole tops.




LMK5211




LMK5129

Floodlight




LMK5101




LMK5201

Alarm · Beacon · Siren



LMK6101

Expander



LMK8401-40

Junction Box Plate Kits


Designed for installations in accordance with IEC standards.

Suits Models

S2 M1


HST4 M1

H2 M1



JBP1208-50

Single Offset




JBP1201-50

Double, centre mounted

Suits Models


S3 M1

S3 M1 HVPT



JBP1208-40

Single Offset




JBP1201-40

Double, centre mounted

Suits Models


C1 M1

C2 M2



JBP1208

Single Offset




JBP1201

Double, centre mounted

Technical Specifications – Maxis™ joint and Assemblies

MAXIS™ JOINT MATERIAL & FINISH	
Material: Steel - Grade AISI 1045 Investment Cast	Material: Stainless Steel - Grade AISI 316 Investment Cast
Finish: Hot-dip galvanised (HG)	Finish: Electrolytic polishing
Compatible with aluminium products.	

MANUFACTURING STANDARDS – MAXIS™ ASSEMBLIES	
Steel Structures	AS 4100
Structural Design Actions	AS/NZS 1170
Steel Pipe	EN 10210-1
Hot-dip galvanizing	ISO 1461
Stainless Steel Pipe	EN 10296-2
Aluminium Pipe 6061 T6 or 6082 T6	BS-EN 755-2

CERTIFICATION & CLASSIFICATION	
ATEX - TUV RHEINLAND - Statement for non-applicability of Directive 2014/34/EU - Maxis™ M1 & M2 Series - Available upon request.	
Manufacturers EU Declaration of Conformity - CE - Maxis™ M1 and M2 Series - Available upon request.	
Manufacturers UK Declaration of Conformity - UKCA - Maxis™ M1 and M2 Series - Available upon request.	
Maxis™ M1 and M2 models have been evaluated as structurally adequate by a 3 rd party Structural Engineer (Structural Certificate T-21-436) in accordance with the above mentioned AS 4100 and AS 1170 Australian Standards - Available upon request.	
The models are suitable for specification in the UK and Europe when loadings have been calculated in accordance with the design actions as listed in the Structural Certificate referenced above.	

BENDING MOMENT CAPACITY			
The following summarises the capacity of pole tops tested with the Maxis™ joint assembly and the load exceeded in testing. The tabulated capacities represent the loading in which testing was terminated and the joint remained functional.			
Maxis™ Model	Max Top Pole Size (GR350 Carbon Steel / GR205 Stainless Steel)	Joint capacity exceeded in testing (kNm)	
		Carbon steel	Stainless steel
M1	DN32 (42.4x4.9)	3.11	1.64
M1	DN40 (48.3x3.67)	3.11	1.64
M2	DN50 (60.3x5.54)	5.23	2.76
Note: Maxis™ M1 and M2 components form part of lowering light poles which are supplied independent of light fixture. As the final structural loading is dependent on the light fixture fitted and installation location, it is the design responsibility of the specifying engineer to ensure the structural adequacy of the model contained in the final installed light pole assembly, based on the limits of its structural elements provided above.			

DISCLAIMER
The adequacy of the guardrail and supporting structure must be verified by a site approved engineer. Swivelpole Europe B.V and/or Exemplar Products Pty Ltd, subsidiaries and related entities ("Swivelpole") will accept no responsibility for failure due to inadequacy of the supporting structure or guardrail to which the Maxis™ is mounted.

DESIGN COMPLIANCE
The Swivelpole™ product range has been developed to meet the design criteria of a range of site conditions, including cyclonic winds and hazardous environments.
For additional information on our products and product configurations to suit your design compliance needs, please contact us at sales.eu@swivelpole.eu.
Site engineers are responsible for determining the relevant design criteria, including design wind speed and to select the appropriate products from the Swivelpole™ product range to meet this criteria.

WARRANTIES*
5 year limited warranty
1. All equipment and goods are warranted by the seller to be free from defects in material and workmanship for five (5) years from the date of shipment.
Normal wear of equipment or goods, equipment or goods which are misused, abused, or damaged, or not used in accordance with the seller's instructions are excluded in this warranty.
No warranty shall apply or responsibility be taken for any modifications, alterations or additions to the standard product design. This includes exceeding recommended maximum weights for any fittings or exceeding the installed height.
No warranty shall apply where the product is exposed to caustic chemicals or harsh chemical, marine and salt environments.
Optional material finish of powder coating is completed by third parties and whilst all care is taken by Swivelpole™, warranty is limited to the (12) months Supplier's standard warranty. This warranty does not apply to equipment or goods which are misused, abused or damaged or not used in accordance with seller's instructions. Normal wear of equipment or goods are excluded in this warranty. All care should be taken for the longevity of the powder coat finish.
The adequacy of the High Vibration Pole Top (HVPT) is not guaranteed/ warranted for specific site suitability due to the vibration frequency variances in site and structure conditions. We can guarantee that the HVPT will improve performance and extend design life when compared to an ordinary pole exposed to the same vibrations. Swivelpole Europe B.V. and or Exemplar Products Pty Ltd, subsidiaries and related entities ("Swivelpole") will accept no responsibility or liability, direct or consequential, for failure of this product.
2. Equipment or goods not manufactured by the seller but supplied through the seller shall carry the warranty of the original manufacturer.
The seller's sole liability under this warranty shall be limited to either replacing or repairing without charge, at its factory or elsewhere at its discretion, any equipment or goods not meeting this warranty, or at seller's option, refunding the purchase price. The seller shall in no event be liable for any other direct or any special indirect or consequential damages of any kind under this contract or otherwise.
* Subject to change without notice.

COPYRIGHT & PATENT
This document is the property of and protected by copyright owned by Swivelpole Europe B.V. and or Exemplar Products Pty Ltd. The designs and other information embodied in this document comprise confidential information of Swivelpole Europe B.V. and or Exemplar Products Pty Ltd and form part of products covered by international patents and registered designs including Europe patent No 2992151. Unauthorised use, reproduction and disclosure are strictly prohibited.





SWIVELPOLE™ LOWERING POLE SOLUTIONS

**TRUSTED GLOBALLY BY
ASX & FORTUNE 500
COMPANIES**

Swivelpole™ is recognised for providing customers with simple, fast and affordable access to fixtures and equipment.

Our innovative access solutions eliminate the risk of working at heights, through the controlled lowering of equipment and fixtures to a safe and comfortable working position.

After over 25 years of continuous development and improvement, Swivelpole™ has developed a comprehensive product range to suit industrial and commercial applications up to 7 metres.

Swivelpole™ have an extensive global sales history to some of the world's largest companies and in the most remote and challenging environments. We continue to be specified as the product of choice for proven performance and Return on Investment.

SALES & SUPPORT

Tel: +31 (0)85 070 5890

Email: sales.eu@swivelpole.eu

**Schillingstraat 15
2988 CT Ridderkerk
The Netherlands**

Swivelpole™ © 2025

This document and all its contents is the property of Swivelpole Europe B.V. and or Exemplar Products Pty Ltd and is protected by copyright worldwide. Unauthorised use and reproduction is strictly prohibited. All rights reserved.

Every effort has been made to ensure that the information in this document is accurate. Swivelpole Europe B.V. and or Exemplar Products Pty Ltd are not responsible for printing or clerical errors.

The Maxis™ joint and Swivelpole™ product range is protected by patents and registered designs worldwide. All rights reserved.

ACCESS MADE EASY.

